

CYBOX AP 2-0

ELTEC

systems

OUTDOOR RAILWAY ACCESS POINT WITH WI-FI 5 DUAL RADIO



MADE
IN
GERMANY

KEY FEATURES

- IEEE802.11ac compliant with 3x3 MIMO
- Up to two Wi-Fi interfaces for dual band mode
- Backwards compatible with 802.11a/b/g/n
- Dual 1 Gigabit Ethernet on M12 X-coded connectors
- Optional internal high-speed Ethernet switch
- Optional bypass relays
- Power over Ethernet (PoE+) according to IEEE 802.3at
- Ultra-wide-range power supply 24 to 110 VDC
- IP67 die-cast aluminum housing
- Built-in cyber security
- Maintenance-free design
- -40 °C to +70 °C operating temperature
- EN 50155 compliant

TYPICAL APPLICATIONS

- Stationary and Mobile Wi-Fi
- Passenger Entertainment
- Passenger Information
- Ticketing System
- Fleet Management
- Video Surveillance

HIGH-END WIRELESS COMMUNICATION

The CyBox AP 2-0 is a member of the CyBox family – robust access points for railway and wayside applications. The rugged and waterproof IP67 housing is especially designed for outdoor use. It is suitable for any mounting location that is exposed to moisture and harsh environmental conditions. The access point offers stable, secure, and high bandwidth connections between the local Ethernet and wireless clients. With the assistance of the access point, multiple mobile Wi-Fi-compatible devices in a passenger train, subway, train station, or alongside tracks have the possibility to communicate with the Internet or access local data, such as timetable information and multimedia data.

BACKBONE CONNECTIVITY

On the fixed network side, the access point features two Gigabit Ethernet ports which are, as an option, internally connected to an unmanaged switch and can be used either for redundancy to increase the availability of services, or to connect a second CyBox AP 2-0. The bypass relay option ensures a high-speed connection even if the access point is powered down.


MULTIPLE POWER OPTIONS

The CyBox AP 2-0 provides flexible powering options by either an internal power supply or Power-over-Ethernet (PoE+). The PoE daisy chaining offers wireless connectivity with two access points using just one cable – a noticeable cost saving factor especially in retrofit programs.

USER-INTERFACE AND SECURITY FEATURES

The CyBox AP 2-0 firmware provides a convenient management interface via a web service. Besides global setup parameters the open source software OpenWrt allows the configuration of the radio interfaces, including provider information and the login dialog, as well as the setup of the stateful firewall. The access point and router configurations as well as the management firmware can be updated remotely. Furthermore the built-in fully configurable stateful firewall and multi-VPN support with hardware-accelerated encryption ensures communication security.

BLOCK DIAGRAM

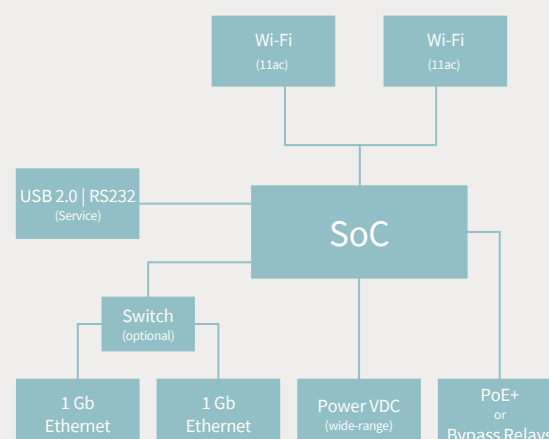

CYBOX AP 2-0

ELTEC

systems

OUTDOOR RAILWAY ACCESS POINT WITH WI-FI 5 DUAL RADIO

TECHNICAL DATA

PHYSICAL INTERFACES	
System Architecture	Dual-Core CPU, 1200 MHz
Software	Linux OS OpenWrt
Antenna	N-type connectors
LAN	2x 10/100/1000BaseT(X), M12 X-coded
USB/Serial Port	M12 8-pin female A-coded, USB 2.0, RS232
Power Input	M12 4-pin male A-coded

ELECTRICAL SPECIFICATIONS	
Power Supply	24 to 110 VDC, wide-range power supply (16.8 V min. to 154 V max.)
Power over Ethernet	PoE+, Class-4 powered device, IEEE 802.3at
Interruptions of Voltage Supply	compliant to EN 50155, Class S2
Power Consumption	15 W typ., 25 W max.

ENVIRONMENTAL CONDITIONS	
Ambient Temperature	Class TX, -40.. +70 °C (85 °C) operating, -40.. +85 °C storage
Humidity	max. 90 % non-condensing operating and storage
Altitude	Class AX, up to +2000 m
PCB Protection	conformal coating

RELIABILITY	
MTBF	approx. ~260.000 h

MECHANICAL SPECIFICATIONS	
Dimensions	170 mm x 60 mm x 279 mm (w h d)
Weight	up to 2250 g
Housing	IP67, die-cast aluminum, wall-mount, conductive cooling

STANDARD CONFIGURATIONS

ORDER NO.	DESCRIPTION
CYAPO-2090	2x Wi-Fi 802.11ac, 2x 1 Gb ETH (M12X), PoE+

Further information on www.eltec.com

MODULES

WI-FI INTERFACE IEEE 802.11 a/b/g/n/ac	
Transfer Rates	up to 1300 Mbps
Frequency Range	2.412 GHz to 2.472 GHz, or 4.920 GHz to 5.825 GHz, selectable band
RF	3x RF antennas, 3x3 MIMO technology
Encryption	AES, TKIP, WPA, WPA2
Operational Feature	up to 128 clients per radio
Security	stateful firewall with multi-level client isolation

STANDARDS AND SPECIFICATIONS

Directive 2008/57/EC	EN 50155 (IEC 60571)
	EN 45545-2 (HL 1 to HL 3)
	EN 61373 (Category 1, Class B)
RED – 2014/53/EU	EMC
	radio spectrum
	health & safety
FCC	Title 47 CFR Part 15B

OPTIONS

Modules	various combinations of Wi-Fi modules
Evaluation Kit	soon available