

CYBOX ES-A 11U

UNMANAGED 11-PORT AUTOMOTIVE SWITCH

ELTEC

systems

MADE
IN
GERMANY



Picture may be subject to change

KEY FEATURES

- 9-port 10/100/1000 BaseT(X) on M12 X-coded connectors
- 2-port 100/1000/2500 BaseT(X) on M12 X-coded connectors
- Fully non-blocking wire-speed switching
- 4,096 MAC addresses available
- Most advanced Energy-Efficient Ethernet (IEEE802.3az) for optimized power consumption
- Overheat protection
- Hardware loop detection
- Integrated automotive power supply 12 to 24 VDC
- PoE+ power supply budget up to 100 W
- Maintenance-free design
- -40 °C to +75 °C operating temperature
- E1 compliant

TYPICAL APPLICATIONS

- Passenger Wi-Fi
- Passenger Entertainment
- Passenger Information
- Ticketing System
- Fleet Management
- Video Surveillance

HIGH-END WIRELESS COMMUNICATION

The CyBox ES-A is a robust unmanaged 11-port Gigabit Ethernet switch for automotive applications. It offers advanced Energy-Efficient Ethernet (EEE) for low-power, high-performance solutions. Its high-end connectors are especially suitable to reliably transmit data and power under the most extreme use with regard to shock and vibration. The switch offers stable, secure, and high bandwidth connections between the local Ethernet and a variety of network devices such as IP cameras or ELTEC Wi-Fi access points and 5G/LTE routers. It is particularly designed to meet the requirements of automotive applications.


MODULAR PLATFORM

Due to the highly modular concept the CyBox ES-A can be easily equipped with different power supply modules to meet your application demands. These are pre-assembled units to offer flexible configurations for short delivery times. The fanless and maintenance-free design features various mounting options like wallmount, DIN rail and 19" rack mounts to integrate the system into an existing environment.

MULTIPLE POWER OPTIONS

The CyBox ES-A provides flexible powering options. It can be equipped with an internal 30 W power supply or a Power-over-Ethernet (PoE+) input port to extend the power delivery to external PoE+ capable devices. The PoE+ standard provides up to 25.5 W at each port depending on the power consumption of the end devices. The CyBox ES-A supports a maximum output power budget of up to 100 W in total with an internal power supply via all 11 ports. For the PoE+ input port an external PoE+ power supply unit is needed.

BLOCK DIAGRAM

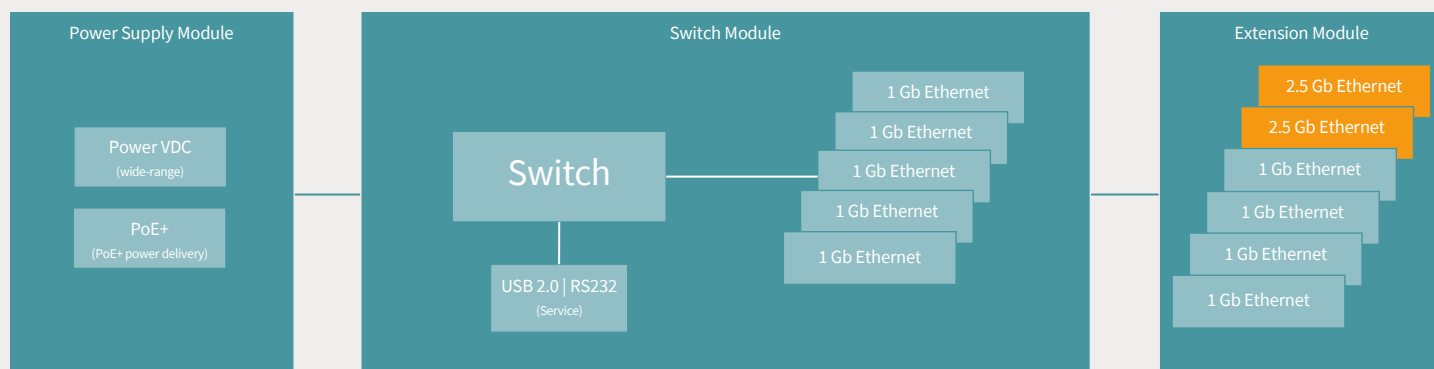

CYBOX ES-A 11U

UNMANAGED 11-PORT AUTOMOTIVE SWITCH




TECHNICAL DATA

PHYSICAL INTERFACES	
LAN	9x 10/100/1000 BaseT(X), 2x 100/1000/2500 BaseT(X), M12 X-coded
Console Port	M12 8-pin female A-coded
Power Input	3-pin male / ignition contact
Reset Switch	available on the front panel

ELECTRICAL SPECIFICATIONS	
Power Supply	12 to 24 VDC, wide-range power supply (8 V min. to 32 V max.)
Power over Ethernet	optional PoE+, Class-4 powered device, IEEE 802.3at
Interruptions of Voltage Supply	compliant to ISO 16750-2
Power Consumption	12 W typ., 15 W max.
Power Delivery	100 W max. for PoE+ option or more with external PoE+ power supply

ENVIRONMENTAL CONDITIONS	
Ambient Temperature	-40.. +75 °C operating, -40.. +85 °C storage
Humidity	max. 95 % non-condensing operating and storage
Altitude	up to +2000 m

RELIABILITY	
MTBF	approx. ~350.000 h

MECHANICAL SPECIFICATIONS	
Dimensions	214 mm x 112 (129) mm x 65 mm (w h d), (incl. wall-mount mounting points)
19-inch Rack Mounting	42 TE housing, 3 U rack compatible
Weight	2500 - 3000 g depending on modules
Housing	IP40, aluminum, DIN-rail, conductive cooling

STANDARD CONFIGURATIONS

ORDER NO.	DESCRIPTION
CYESA-1011	9x 10/100/1000 BaseT(X), 2x 100/1000/2500 BaseT(X) (M12X), unmanaged
CYESA-1111	9x 10/100/1000 BaseT(X), 2x 100/1000/2500 BaseT(X) (M12X), unmanaged, PoE+ input port
CYESA-1211	9x 10/100/1000 BaseT(X), 2x 100/1000/2500 BaseT(X) (M12X), unmanaged, PoE+ power delivery

Further information and order numbers on www.eltec.com

STANDARDS AND SPECIFICATIONS

DIRECTIVES AND REGULATIONS	
Standards	ISO 16750-1, -2, -3, -4, -5
E1 Type Approval	UN ECE R10, R118
Directive 2014/30/EU	EMC
Directive 2014/35/EU	Low Voltage

OPTIONS

Mounting	wall-mount, 19-inch rack
Powering Option	PoE+ with external PoE input port for higher power output applications or PoE+ internal 100 W power supply module
Evaluation Kit	soon available